

2013



FOCUS! CORE! BUILDING FUTURES!


Apach Industrial's humble beginnings began in 1993 in Taichung, Taiwan known worldwide for its machining and tool making prowess. Superior technology in metals and CNC machining in conjunction with a strong Taiwanese supply base made this area thrive with quality manufacturers of pneumatic and power tools. To this day the world's top name brands still build their high value quality tools here in Taiwan.

Apach is proud of the fact that we were one of the first companies from Taiwan to introduce an 18 gauge angled brad nailer into the United States construction market in the late 90's. Apach was also one of the first to make our industrial stapler line a brand name known and trusted in the North American market

The vision of Apach as the People's tool has always been at the core of what we do. Professional craftsman making furniture, framing homes, making cabinets and using our tools to build the things that we use each and every day is the reason why we focus on dependability and safety. Over the years we realized maximum customer satisfaction is not just a quality management system goal it's a commitment to society. It's our commitment to Building Futures!




INDEX PAGES



Coil Nailers

p06-10

CN-130E	Industrial Coil Nailer	06
CN-100E	Industrial Coil Nailer	06
CN-90LH	Industrial Coil Nailer	07
CN-83E	Industrial Coil Nailer	07
CN-70E2	Industrial Coil Nailer	08
CN-57E	Industrial Coil Nailer	08
CN-50P	Industrial Coil Nailer	09
CN-565S	Siding Coil Nailer	09
RN-45E2	Roofing Coil Nailer	10

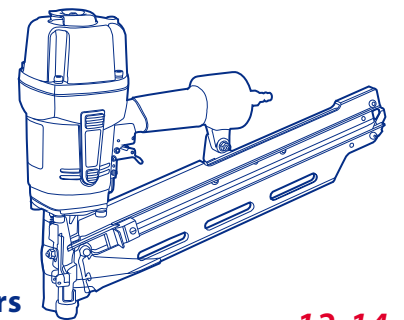

Framing Nailers


p12-14

L2190	21 Degree Strip Framing Nailer	12
L3490	34 Degree Strip Framing Nailer	13
AN-10021E	21 Degree Strip Framing Nailer	13
AN-10034E	34 Degree Strip Framing Nailer	14
AN-13021E	21 Degree Strip Nailer	14

Finish Nailers

p16-19


LNF-32AD	18 GA Brad Nailer	16
LNF-50AC	18 GA Brad Nailer	17
LNF-50E	18 GA Angle Brad Nailer	17
LT-50LLAC	15 / 16 GA Finish Nailer & Concrete Nailer, Light Duty	18
LT-1664A	15 / 16 GA Finish Nailer	18
DA-64E	DA Series Angle Finish Nailer	19
PT-635L	23 GA Micro Pinner	19

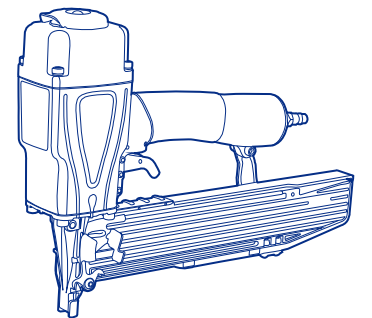

Staplers

p22-33

LU-1580F	15 GA Medium Crown Stapler	22	LU-7116AUTO/LM	Auto-Fire Staplers, Long Magazine	30
LU-216LC1	16 GA Medium Crown Stapler	22	LU-1116AUTO/LM	Auto-Fire Staplers, Long Magazine	30
LU-50040LAC	18 GA Medium Crown Stapler	23	LU-1416AC	14 Series Fine Wire Stapler	31
LU-9040KT	18 GA Narrow Crown Stapler, Heavy Duty	23	LU-6432	64 Series Stapler	31
LU-9040LAD	18 GA Narrow Crown Stapler, Light Duty	24	LU-6432EN/LM	64 Series Fine Wire Stapler, Long Magazine	32
LU-9025AC	18 GA Narrow Crown Stapler	24	LU-9725AC	97 Series Stapler	32
LU-9225AC	18 GA Medium Crown Stapler	25	LU-2538	16 GA Wide Crown Stapler	33
LU-G40LAC	18 GA Medium Crown Stapler	25	LU-2638	16 GA Wide Crown Stapler	33
LU-G32HAC	18 GA Medium Crown Stapler, Long Nose	26			
LU-G25AC	18 GA Medium Crown Stapler	26			
LU-8016F	80 Series Fine Wire Stapler	27			
LU-8016LAC	80 Series Fine Wire Stapler Long Nose	27			
LU-8016AUTO/LM	Auto-Fire Staplers, Long Magazine	28			
LU-5018AC	50 Series Fine Wire Stapler	28			
LU-7116F	71 Series Fine Wire Stapler	29			
LU-7116LAC	71 Series Fine Wire Stapler, Long Nose	29			

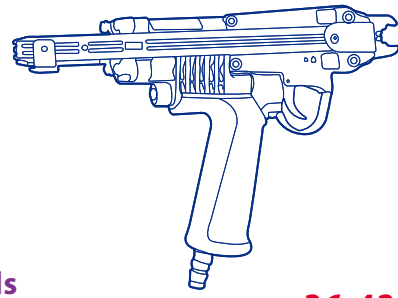

Specialty Tools

p36-42

PTS-8400	Palm Nailer	36
AMC-38	Metal Connector Nailer	37
CF-15AA · CF-15AP	Corrugated Fastener Tools	37
LPHC	Pneumatic Hog Ring Tools	38
LPHCN	Pneumatic Hog Ring Tools	39
MS-1619	Mattress Stapler	40
AFS-9040	18 GA Flooring Stapler	41
CN-70CL	Pneumatic Clinch Nailer	42
HWFS-50	Hardwood Flooring Stapler	42


Accessory

p43

Sequential Trigger Kit	43
Belt Hook Kit	43
Selectable Single / Bump Fire Trigger Valve Asm	43
Remote Fire Control Trigger Valve	43
Vinyl Siding Yoke Kit	43
No-mar Tip	43
1/4" Swivel Plug	43

Common Applications

 Roofing, Carpentry	 Cabinets, Furniture, Light wood assembly
 Framing, Joiner	 Packaging, Crating, Pallets
 Upholstery, Furniture, Bedding	 Siding, Sheathing, Paneling, Fencing
 Door, Window, Trimming, Picture Frames, Building Components	 Industrial, Pre-Fabricated Housing

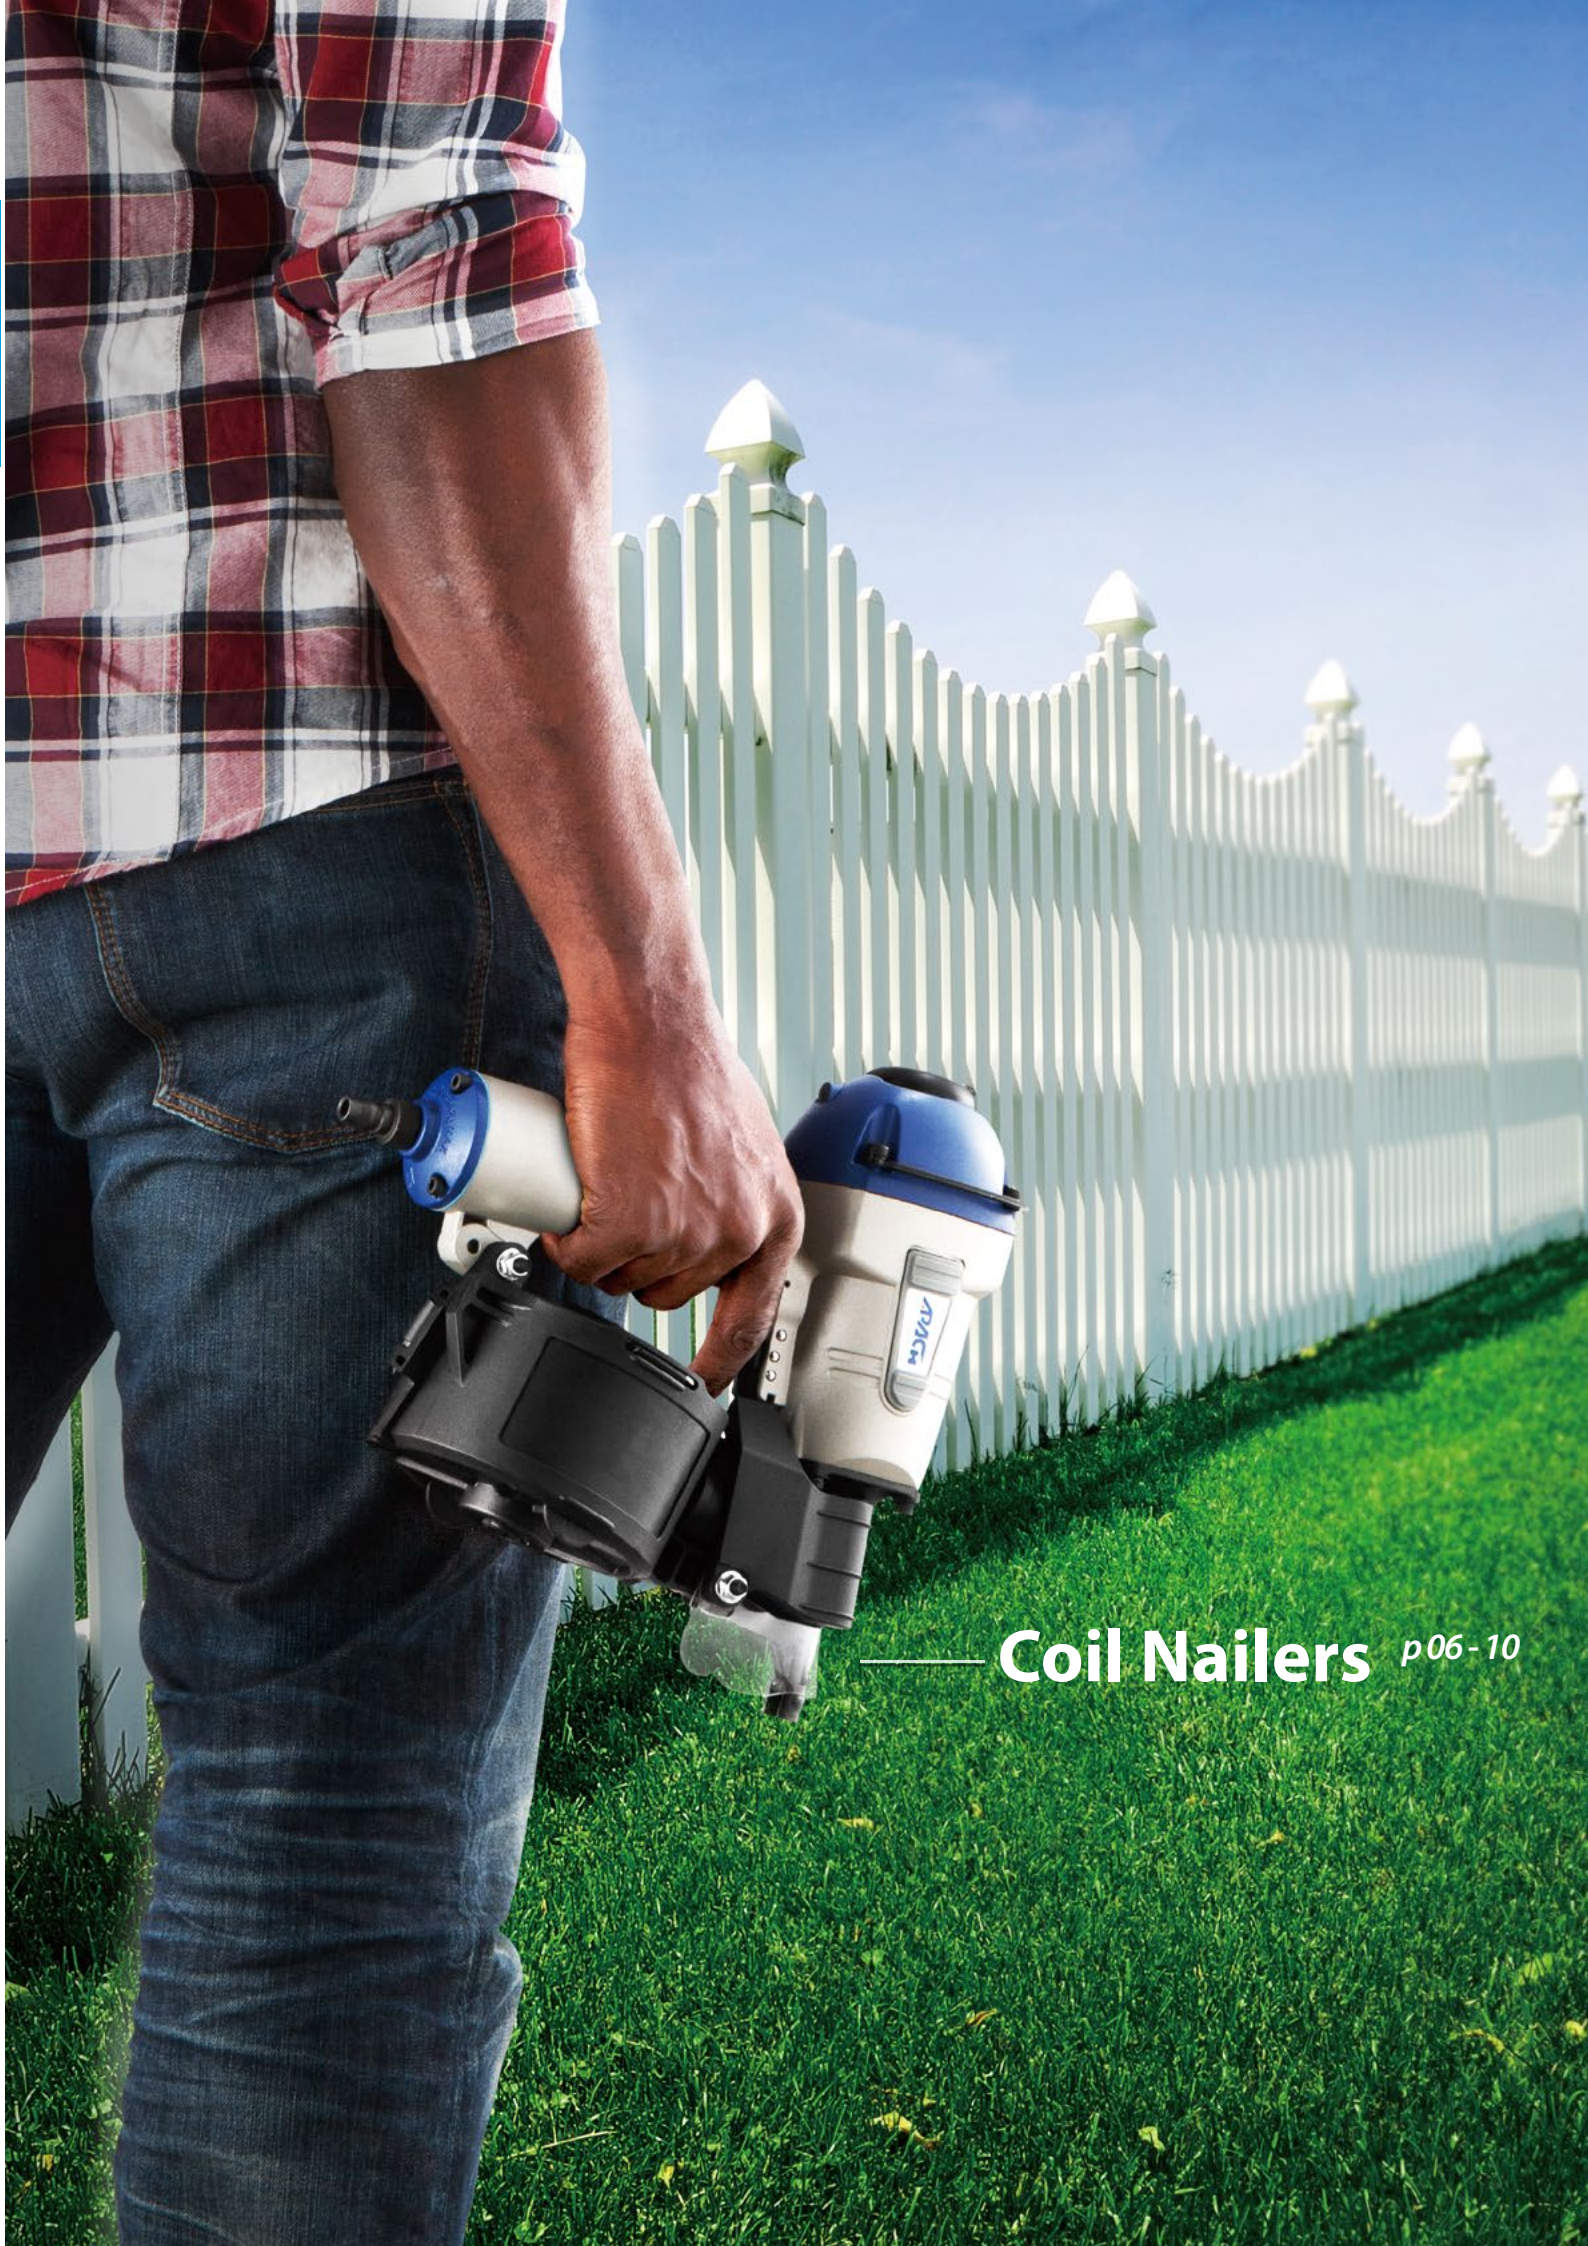

Coil Nailers p06 - 10

Coil Nailers

Industrial Coil Nailer



CN-130E


- Features**
- Ergonomic Design, Well Balanced
 - Powerful, Rapid Nailing Performance
 - Sequential Trigger
 - Removable Auxiliary Side Handle
 - Body Protectors Equipped

- Fasteners**
- 15° Flat Wire Collated Nails
 - Length: 3 1/2 - 5 1/8" (90 - 130 mm)
 - Shank Diameter: .131 - .150" (3.3 - 3.8 mm)
 - Shank Type: Smooth, Ring & Screw



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
5.7 kg	354 x 149 x 473 mm	5.5 - 8 kg / cm	180 nails
12.54 lbs	14" x 5 7/8" x 18 5/8"	80 - 120 psi	180 nails

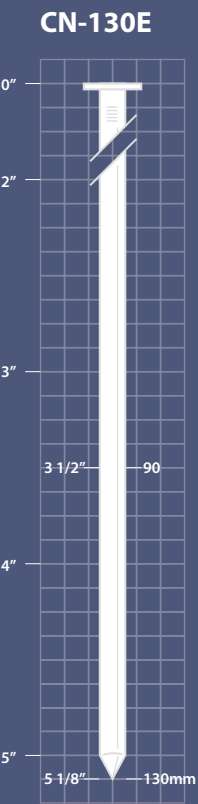

Coil Nailers

Industrial Coil Nailer



CN-90LH


- Features**
- Ergonomic Design, Well Balanced
 - Powerful, Rapid Nailing Performance

- Fasteners**
- 15° Flat Wire Collated Nails
 - Length : 2 - 3 1/2" (50 - 90 mm)
 - Shank Diameter : .099 - .131" (2.5 - 3.3 mm)
 - Shank Type : Smooth, Ring & Screw



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
4.32 kgs	360 x 130 x 350 mm	5 - 7 kg / cm ²	225 - 300 nails
9.51 lbs	14 3/16" x 5 1/16" x 13 3/4"	70 - 100 psi	225 - 300 nails

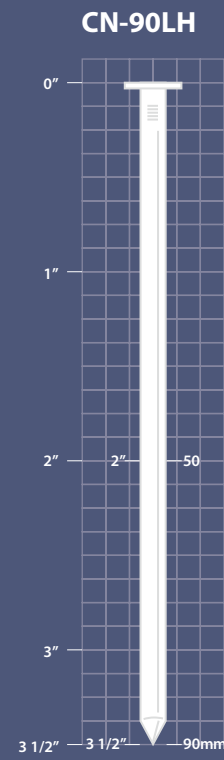

Coil Nailers


Industrial Coil Nailer



CN-100E


- Features**
- Ergonomic Design, Well Balanced
 - Powerful, Rapid Nailing Performance
 - Removable Auxiliary Side Handle
 - Body Protectors Equipped

- Fasteners**
- 15° Flat Wire Collated Nails
 - Length: 2 1/2" - 4" (65 - 100 mm)
 - Shank Diameter : .099 - .131" (2.5 - 3.3 mm)
 - Shank Type : Smooth, Ring & Screw



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
5.36 kgs	355 x 141 x 412 mm	5-7 kg / cm ²	200 - 300 nails
11.8 lbs	14" x 5 1/2" x 16 7/32"	70 - 100 psi	200 - 300 nails

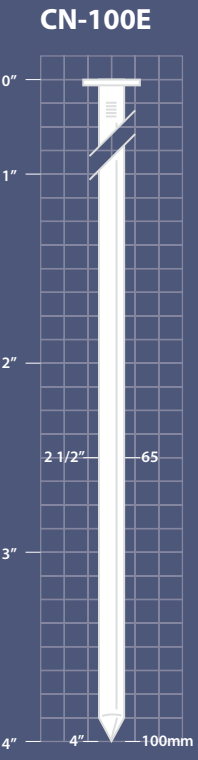

Coil Nailers


Industrial Coil Nailer



CN-83E


- Features**
- Ergonomic Design, Well Balanced
 - Powerful, Rapid Nailing Performance
 - 360° Adjustable Exhaust Port
 - Body Protectors Equipped
 - Adjustable Safety Yoke Available
 - Front Exhaust Cap Available

- Fasteners**
- 15° Flat Wire Collated Nails
 - Length : 2 - 3 1/4" (50 - 83 mm)
 - Shank Diameter : .099 - .131" (2.5 - 3.3 mm)
 - Shank Type : Smooth, Ring & Screw



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.7 kgs	313 x 129 x 349 mm	5 - 7 kg / cm ²	225 - 300 nails
8.2 lbs	12 5/16" x 5 1/16" x 13 3/4"	70 - 100 psi	225 - 300 nails

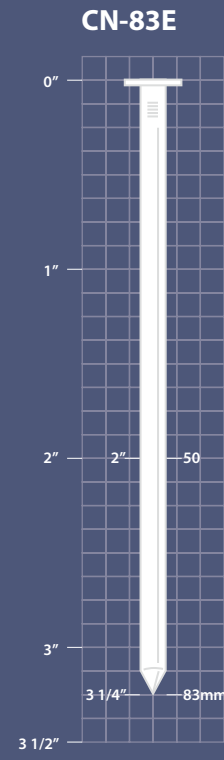

Coil Nailers

Industrial Coil Nailer



CN-70E2

Features

- With 2-Pc Nose Joint Guide
- Ergonomic Design, Well Balanced
- Powerful, Rapid Nailing Performance
- Body Protectors Equipped
- Top Exhaust Cap Available

Fasteners


- 15° Flat Wire Collated Nails
- Length: 1 3/4"-2 3/4" (45 - 70 mm)
- Shank Diameter: .090 - .113" (2.3 - 2.9 mm)
- Shank Type: Smooth, Ring & Screw

Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.62 kgs	320 x 125 x 318 mm	5 - 7 kg / cm ²	225 - 300 nails
7.96 lbs	12 5/8" x 4 7/8" x 12 1/2"	70 - 100 psi	225 - 300 nails

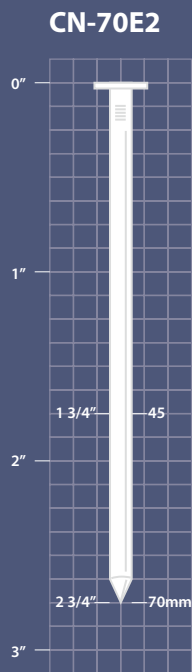

Coil Nailers

Industrial Coil Nailer



CN-57E

Features

- Ergonomic Design, Well Balanced
- Powerful, Rapid Nailing Performance
- 360° Adjustable Exhaust Port
- Body Protectors Equipped
- Adjustable Safety Yoke Available

Fasteners


- 15° Flat Wire Collated Nails
- Length : 1 - 2 1/4" (25 - 57 mm)
- Shank Diameter : .083 - .090" (2.1 - 2.3 mm)
- Shank Type : Smooth, Ring & Screw

Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.5 kgs	285 x 135 x 285 mm	5 - 7 kg / cm ²	300 - 400 nails
5.5 lbs	11 7/32" x 5 5/16" x 11 7/32"	70 - 100 psi	300 - 400 nails

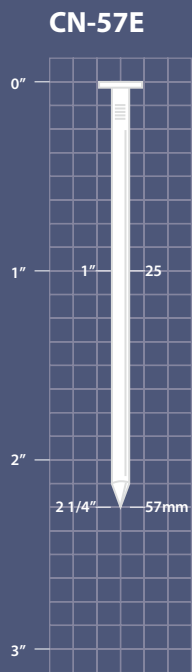

Coil Nailers

Industrial Coil Nailer



CN-50P

Features

- Accepts Both Wire & Plastic Sheet Collated Nails
- Powerful Motor With Minimum Recoil
- Tool-Free Depth Adjustment
- Light-Weight Only 1.6 kg (3.5 lbs)
- Clear Magazine Cover To See Nail Quantity
- Removable No-Mar Rubber Pad With Holder In Magazine
- Tool-Free Selectable Trigger – Change From Single Sequential To Bump Fire Within A Second

Fasteners


- 15° Wire Or Plastic Sheet Collated Nails
- Length : Wire Collated: 1-1/8"-2" (27 - 50 mm)
Plastic Collated: 1-2" (25 - 50 mm)
- Shank Diameter : Wire Collated : .072 - .083" (1.8-2.1 mm)
Plastic Collated: .063 - .083" (1.6-2.1 mm)
- Shank Type : Smooth, Screw & Ring

Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.6 kgs	251 x 117 x 282 mm	5 - 7 kg / cm ²	wire 250 - 400
3.5 lbs	9.9" x 4.6" x 11.1"	70 - 100 psi	plastic sheet 200

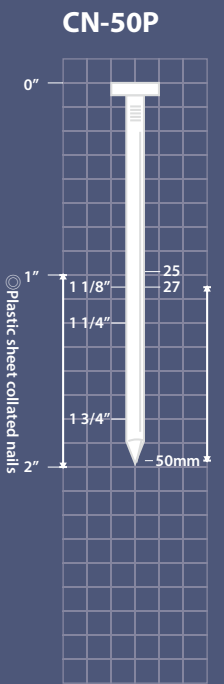

Coil Nailers

Siding Coil Nailer



CN-565S

Features

- Accepts Both Wire & Plastic Sheet Collated Nails
- Powerful Motor Drives 250 To 400 Nails Continuously
- Tool Free Depth Adjustment
- Sequential Trigger Available

Fasteners


- 15° Wire & Plastic Sheet Collated Nails
- Length: Wire : 1 3/4 ~ 2 1/2" (45 - 65 mm)
Plastic Sheet : 1 1/4 ~ 2 1/2" (32 - 65 mm)
- Ø : .090 ~ .099" (2.3 - 2.5 mm)

Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.68 kgs	280 x 130 x 320 mm	5-7 kg / cm ²	wire 250 ~ 400
5.9 lbs	11" x 5" x 12.6"	70 - 100 psi	plastic sheet 200

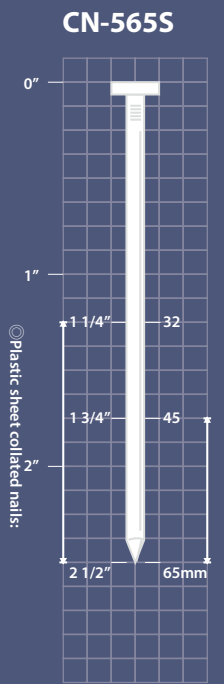

Coil Nailers

Roofing Coil Nailer



RN-45E2

Features

- Ergonomic Design, Well Balanced
- Low Noise Low Vibration, Less Fatigue
- See-Thru Side Loading Magazine
- Sequential Trigger Available
- 360° Adjustable Exhaust Port
- Body Protectors Equipped
- Rapid Nailing Performance
- Carbide Insert In Safety Tip For Increased Wear Resistance Against Tar Paper
- Tool-Free Depth Adjustment
- Integrated Magnet In Nose To Hold The Last Nail
- Durable Metal Shingle Guide
- Nice Belt Hook

Fasteners

- Length : 7/8" - 1 3/4" (22-45 mm)
- Shank Diameter : .120"(3.05 mm)



Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.6 kgs	269 x 118 x 283 mm	5 - 7 kg / cm ²	120 nails
5.7 lbs	10 5/8" x 4 5/8" x 11 1/8"	70 - 100 psi	120 nails

RN-45E2

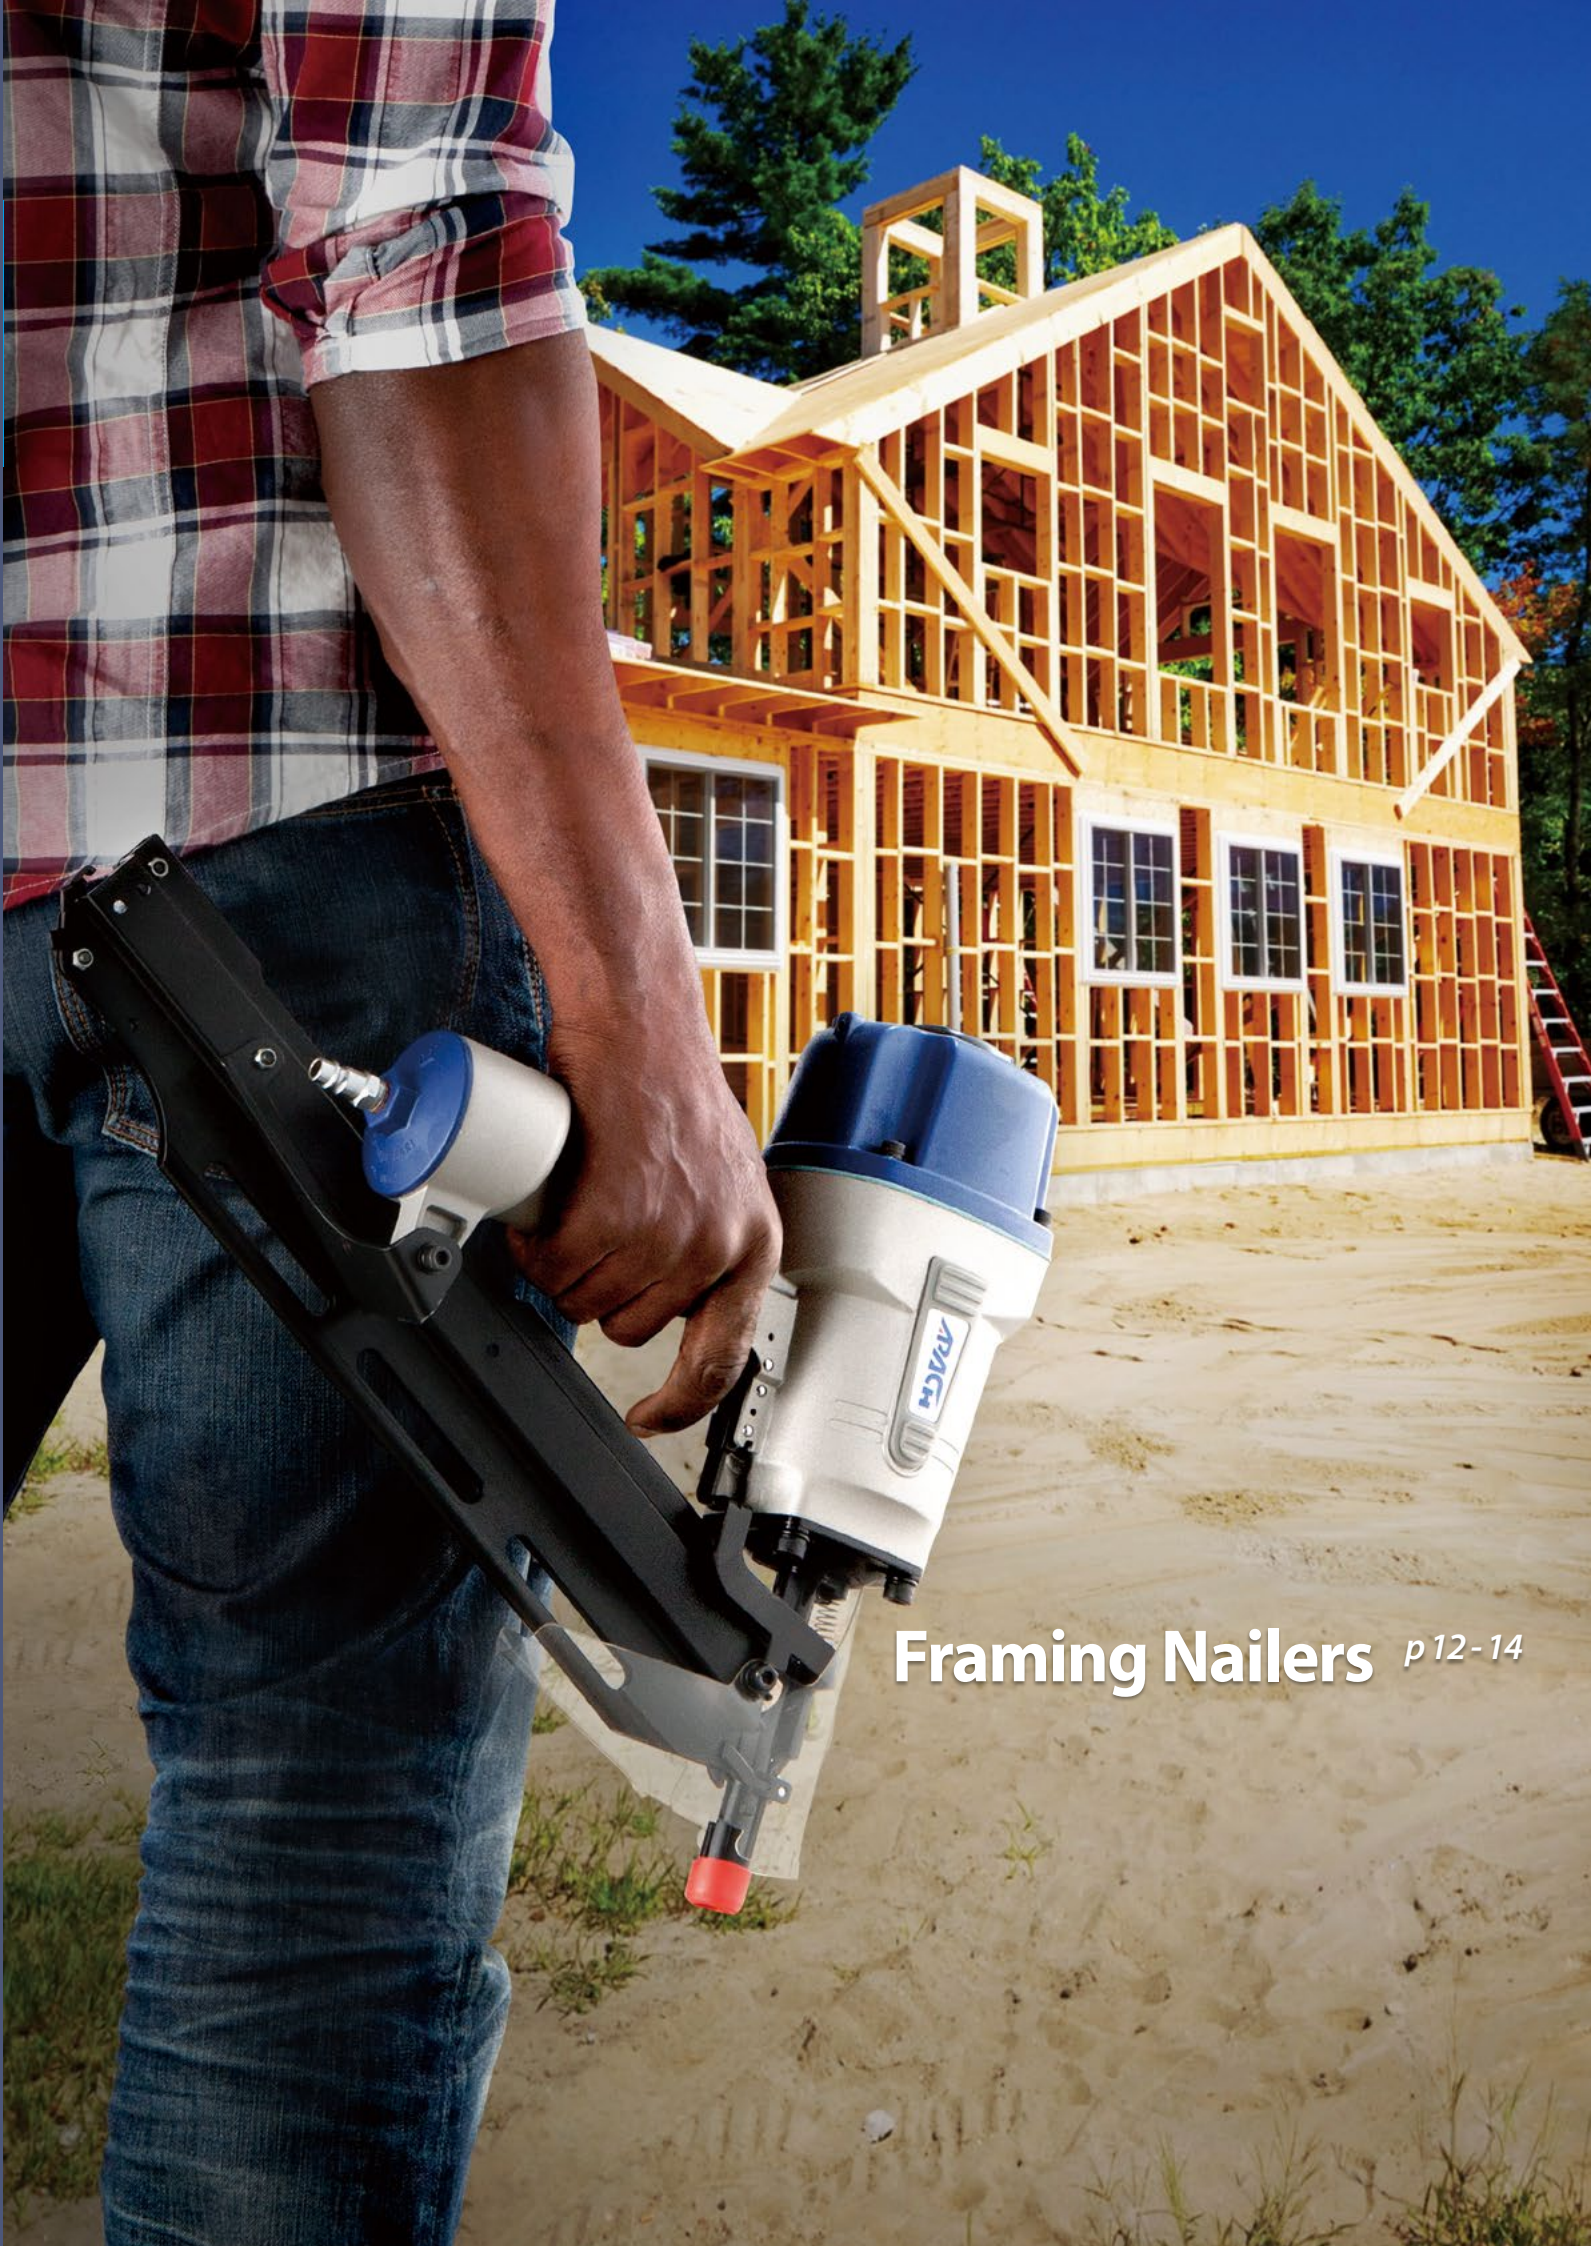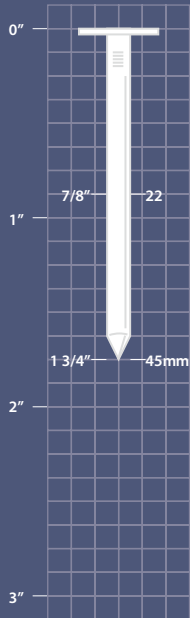


Framing Nailers *p12-14*

Framing Nailers


21 Degree Strip Framing Nailer

L2190

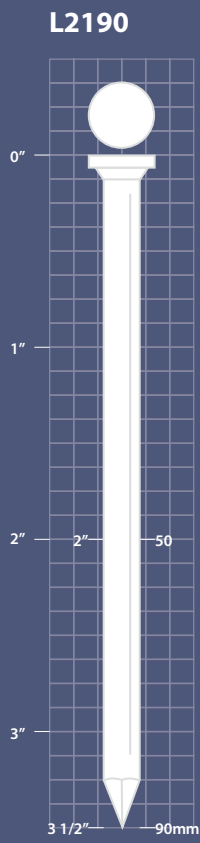

- Features
- 360° Adjustable Air Deflector
 - Depth-Of-Drive Adjustment
 - Toe-Nailing Teeth For Slip-Free Grip
 - No-Mar Rubber Pad
 - Sequential Fire Trigger Available (#30805301A)

- Fasteners
- 21° Full Head Plastic Collated Strip Nails
 - Ø .113 - .161" / 2.87 - 4.1 mm



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.65 kgs	465 x 115 x 370 mm	5 - 7 kg / cm ²	60 nails
8 lbs	18.3" x 4.5" x 14.6"	70 - 100 psi	60 nails

Framing Nailers

34 Degree Strip Framing Nailer

L3490




- Features
- 360° Adjustable Air Deflector
 - Depth-Of-Drive Adjustment
 - Toe-Nailing Teeth For Slip-Free Grip
 - No-Mar Rubber Pad
 - Sequential Fire Trigger Available (#30805301A)

- Fasteners
- 34° D Head Paper Tape Collated Strip Nails
 - Ø .113 - .161" / 2.87 - 4.1mm



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.65 kgs	465 x 115 x 370 mm	5 - 7 kg / cm ²	75 - 90 nails
8 lbs	18.3" x 4.5" x 14.6"	70 - 100 psi	75 - 90 nails

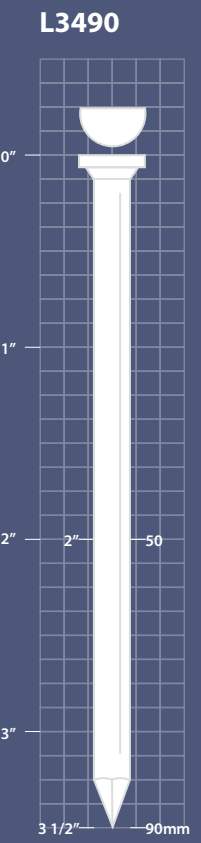

Framing Nailers


21 Degree Strip Framing Nailer

AN-10021E




- Features
- 360° Adjustable Air Deflector
 - Depth-Of-Drive Adjustment
 - Toe-Nailing Teeth For Slip-Free Grip
 - No-Mar Rubber Tip
 - Sequential Fire Trigger Available (#25205301A)

- Fasteners
- 21°Full Head Plastic Collated Strip Nails
 - Ø .113-.161" / 2.87 - 4.1mm



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.64 kgs	495 x 117 x 376 mm	5 - 7 kg / cm ²	60 nails
8 lbs	19.5" x 4.6" x 14.8"	70 - 100 psi	60 nails

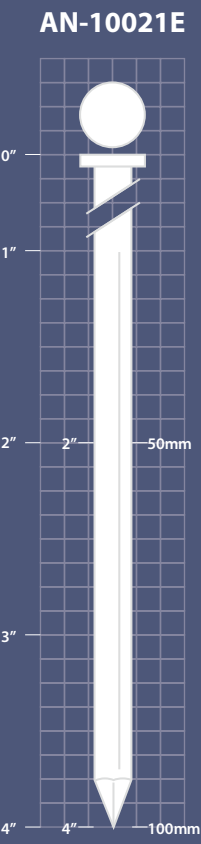

Framing Nailers

34 Degree Strip Framing Nailer

AN-10034E



- Features**
- 360° Adjustable Air Deflector
 - Depth-Of-Drive Adjustment
 - Toe-Nailing Teeth For Slip-Free Grip
 - No-Mar Rubber Tip
 - Sequential Fire Trigger Available (#25205301A)

- Fasteners**
- 34° D Head Paper Tape Collated Strip Nails
 - Ø .113 - .161" / 2.87 - 4.1mm

Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.64 Kgs	495 x 117 x 376 mm	5 - 7 kg / cm²	60 nails
8 lbs	19.5" x 4.6" x 14.8"	70 - 100 psi	60 nails

Framing Nailers

21 Degree Strip Nailer

AN-13021E



- Features**
- 360° Adjustable Exhaust Deflector With Noise Reducer
 - Depth-Of-Drive Adjustable
 - Aggressive Toe-Nailing Teeth For Slip-Free Grip When Fastening
 - Soft Rubber Grip For Added Comfort And Less Fatigue
 - Well Balanced
 - Sequential Fire Trigger
 - Dry-Fire Lock

- Fasteners**
- 21°Full Head Plastic Collated Strip Nails
 - Ø .131-.165" / 3.33 - 4.19 mm


Applications




Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
5.4 kgs	452 x 188 x 588 mm	5.5 - 8 kg / cm²	50 nails
11.88 lbs	17.8" x 7.4" x 23.1"	80 - 120 psi	50 nails

AN-10034E

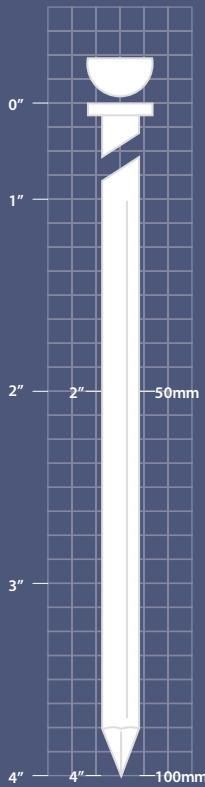

AN-13021E

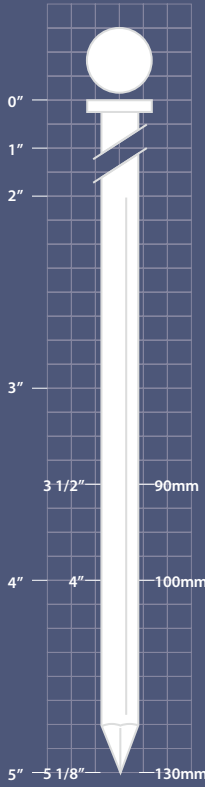

Finish Nailers *p 16-19*



Brad Nailers

18 GA Brad Nailer

LNF-32AD



Features

- 360° Adjustable Air Deflector
- Quick Release Nose Cover
- Optional Single-Bump Fire Switch Available
- No-Mar Rubber Pad Available (#22903801)

Fasteners

- 18 Gauge Brads
- $\varnothing$.050 x .040" / 1.25 x 1.0 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.17 kgs	243 x 58 x 204 mm	5 - 7 kg / cm ²	100 brads
2.57 lbs	9.6" x 2.3" x 8.0"	70 - 100 psi	100 brads

LNF-32AD

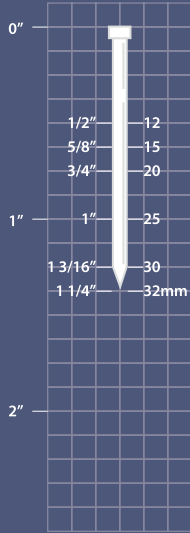

Brad Nailers

18 GA Brad Nailer

LNF-50AC



Features

- 360° Adjustable Air Deflector
- Quick Release Nose Cover
- Optional Single-Bump Fire Switch Available
- No-Mar Rubber Pad Available (#22903801)

Fasteners

- 18 Gauge Brads
- $\varnothing$.050 x .040" / 1.25 x 1.0mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.4 kgs	243 x 58 x 248 mm	5 - 7 kg / cm ²	100 nails
3.08 lbs	9.6" x 2.3" x 9.8"	70 - 100 psi	100 nails

LNF-50AC

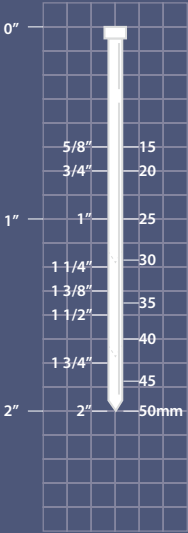

Brad Nailers

18 GA Angle Brad Nailer

LNF-50E



Features

- 360° Adjustable Air Deflector
- Tool-Free Quick Release Nose Cover
- Selectable Single-Bump Fire Trigger
- Removable No-Mar Rubber Tip
- Tool-Free Depth-Of-Drive Adjustment
- Rear Load Magazine
- Light And Compact For All Types Of Trimming Work

Fasteners

- 18 Gauge 25° Angle Brads
- $\varnothing$.050 x .040" / 1.25 x 1.0 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.24 kgs	298 x 58 x 262 mm	5 - 7 kg / cm ²	100 nails
2.73 lbs	11.7" x 2.3" x 10.3"	70 - 100 psi	100 nails

LNF-50E

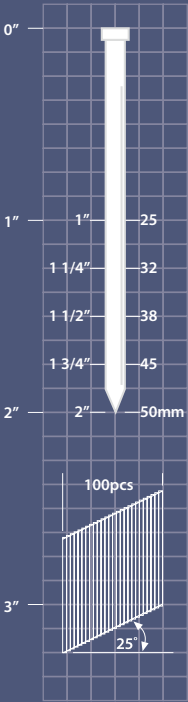

Finish Nailers

15 / 16 GA Finish Nailer & Concrete Nailer, Light Duty



LT-50LLAC

Features

- Accepts Both 16 GA Finish Nails & .072" (1.83 mm) Concrete Nails
- 360° Adjustable Air Deflector
- Light Weight
- Well Balanced
- No-Mar Rubber Pad Available (#22903801)
- Long Magazine

Fasteners

- 15GA Finish Nails : $\varnothing$.069" / 1.75 mm
- 16GA Finish Nails : $\varnothing$.063 x .055" / 1.6 x1.4 mm
- 15GA $\varnothing$ 1.83 Concrete Nails : $\varnothing$.072" / 1.83 mm

Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.4 kgs	250 x 58 x 250 mm	5 -7 kg / cm ²	80 - 100 nails
3.08 lbs	9.8" x 2.3" x 9.8"	70 - 100 psi	80 - 100 nails

Finish Nailers

15 / 16 GA Finish Nailer



LT-1664A

Features

- Accept 15,16 GA Finish Nails & $\varnothing$.072" (1.8 mm) Concrete Pins
- 360° Adjustable Air Deflector
- Quick Release Nose Cover
- Well Balanced
- No-Mar Rubber Pad Available (#21903602)

Fasteners

- 15 GA Finish Nails : $\varnothing$.069" / 1.7 5mm
- 16 GA Finish Nails : $\varnothing$.063 x .055" / 1.6 x 1.4 mm
- 15 GA 1.83 concrete Nails : $\varnothing$.072" / 1.83 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.2 kgs	320 x 80 x 280 mm	5 ~ 7 kg / cm ²	100 nails
4.84 lbs	12 1/2" x 12 1/2" x 11"	70 ~ 100 psi	100 nails

LT-50LLAC

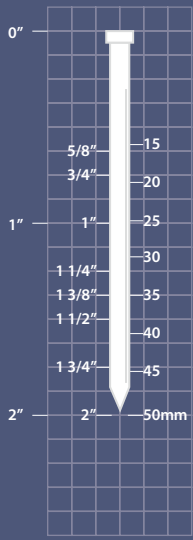

Finish Nailers

DA Series Angle Finish Nailer



DA-64E

Features

- 360° Rotatable Air Deflector
- Rear Load, Durable Aluminum Magazine
- Tool-Free Quick Release Nose Cover for Easy Jam Removal
- Tool-Free Depth-Of-Drive Adjustment
- Removable No-Mar Rubber Pad
- In-Line Magazine

Fasteners

- 15 Gauge Angle Finish Nails
- Compatible With Senco DA Series
- $\varnothing$.069" / 1.7 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.14 kgs	360 x 85 x 310 mm	5 ~ 7 kg / cm ²	100 nails
4.7 lbs	14.2" x 3.3" x 12.2"	70 ~ 100 psi	100 nails

DA-64E

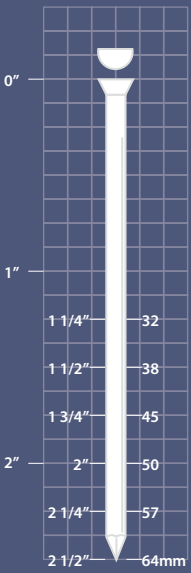

Micro Pinner

23 GA Micro Pinner



PT-635L

Features

- Extended Trigger For Rapid Applications
- Trigger Lock For Increased Safety
- Patented Adjustment-Free Side Loading Magazine
- Accepts Both Headless And Mini Head Pins
- Removable No-Mar Rubber Pad
- Durable Aluminum Magazine
- Nail Lockout To Avoid Empty Shots
- Rear Exhaust To Avoid Stains On Work Piece
- Full Wrap-Around Rubber Grip For Maximum Comfort
- Slim And Tapered Nose For Ease And Precise Nail Placement
- Belt Hook

Fasteners

- 23 GA Headless And Mini Head Pins
- Length : 12-35 mm (1/2 - 1 3/8")
- Shank Diameter : 0.64 mm (.025")


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
0.96 kgs	205 mm x 43 mm x 174 mm	5 ~ 7 kg / cm ²	120 pcs
2.1 lbs	8.07" x 1.69" x 6.85"	70 ~ 100 psi	120 pcs

PT-635L

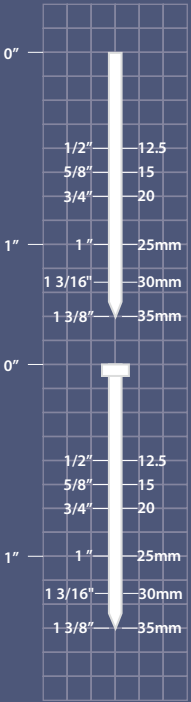



Staplers *p22-33*

Staplers

15 GA Medium Crown Stapler



LU-1580F

- Features**
- Patented Quick Release Nose Cover
 - 360° Adjustable Air Deflector
 - Heavy Duty, Well Balanced
 - Sequential Fire Trigger Available (#25205301A)

- Fasteners**
- Compatible With Duo-Fast 1500, Haubold 7900, Senco Q Series
 - $\sphericalangle$.075" x .067" / 1.9 x 1.7 mm

Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.9 kgs	343 x 97 x 307 mm	6 - 8 kg / cm ²	140 staples
6.5 lbs	13.5" x 3.8" x 12.1"	85 - 110 psi	140 staples

Staplers

16 GA Medium Crown Stapler



LU-216LC1

- Features**
- Lightweight & Well Balanced To Reduce Fatigue & Increase Handling
 - Tool-Free Depth Of Drive Adjustment
 - Robust Metal 360° Exhaust
 - Extended Two Finger Trigger
 - Bump Fire (Orange) Or Full Sequential Trigger (Black) Available
 - Tool-Free Quick-Release Nose For Jam Clearance
 - Robust Light Engineered Polymer Magazine With Stainless Rail Top For Increased Durability
 - Top Load Long Magazine - Quick Loading
 - Open Magazine For Viewing Fastener Quantity
 - Slim Long Nose For Easy Line Of Sight & Easy Access To Tight Spots
 - Increased Bumper Life, Less Downtime And Cost For Service

- Fasteners**
- 16GA Senco N, Haubold KG700 Complete N, Duo-Fast 76
 - 17GA Senco O Series
 - $\sphericalangle$.058 x .050" / 1.47 x 1.27 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.18 kgs	377 x 72 x 276 mm	6 - 8 kg / cm ²	140 staples
4.8 lbs	14 7/8" x 2 7/8" x 10 7/8"	70 - 110psi	140 staples

LU-1580F

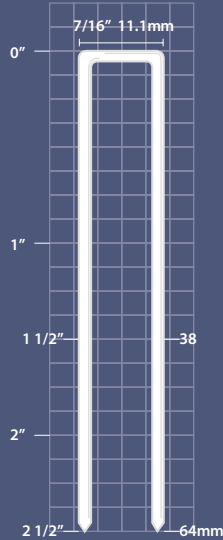

Staplers

18 GA Medium Crown Stapler



LU-50040LAC

- Features**
- 360° Adjustable Air Deflector
 - Bottom Load
 - Light Weight
 - Well Balanced
 - Vinyl Siding Yoke Available (#18303101A)

- Fasteners**
- 18 Gauge Staples Compatible With Haubold 500 Series Staples
 - $\sphericalangle$.050 x .040" / 1.25 x 1.0 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.38 kgs	223 x 58 x 249 mm	5 - 7 kg / cm ²	100 staples
3.03 lbs	8.8" x 2.3" x 9.8"	70 - 100psi	100 staples

LU-50040LAC

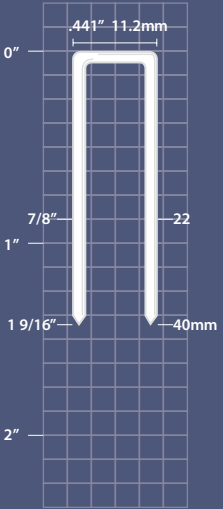

Staplers

18 GA Narrow Crown Stapler, Heavy Duty



LU-9040KT

- Features**
- 360° Adjustable Exhaust
 - Top Load Long Magazine For Increased Efficiency, Quick And Easy Re-Loading
 - Well Balanced And Light Weight
 - Powerful Motor With Minimum Recoil For Enhanced Comfort Of Use And Productivity
 - Tool-Free Quick Release Nose For Jam Removal In Seconds

- Fasteners**
- 18 GA Narrow Crown 90 Series
 - Compatible With Complete L, BeA 90, Duo-Fast 1800, Senco L Series
 - $\sphericalangle$.050" x .040" / 1.25 x 1 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.2 kgs	303 x 72 x 256 mm	5 - 7 kg / cm ²	150 staples
2.64 lbs	11.92 x 2.83 x 10.07"	70 - 100 psi	150 staples

LU-9040KT

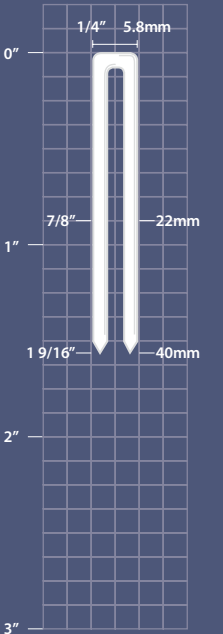

Staplers

18 GA Narrow Crown Stapler, Light Duty



LU-9040LAD

Features

- 360° Adjustable Air Deflector
- Bottom Load
- Light Weight
- Well Balanced
- Tool-free depth adjustment

Fasteners

- Compatible With 90 Series : Complete L, BeA 90, Duo-Fast 1800, Senco L Series
- $\varnothing$.050 x .040" / 1.25 x 1.0 mm

Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.38 kgs	223 x 58 x 246 mm	5 - 7 kg / cm²	100 staples
3.03 lbs	8.8"x 2.3"x 9.7"	70 - 100 psi	100 staples

Staplers

18 GA Narrow Crown Stapler



LU-9025AC

Features

- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available

Fasteners

- 90 Series : Compatible With Complete L, BeA 90, Duo-Fast 1800, Senco L Series
- $\varnothing$.050 x .040" / 1.25 x 1.00 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.2 kgs	223 x 58 x 199 mm	5 - 7 kg / cm²	100 staples
2.64 lbs	8.8 x 2.3 x 7.8"	70 - 100 psi	100 staples

LU-9040LAD

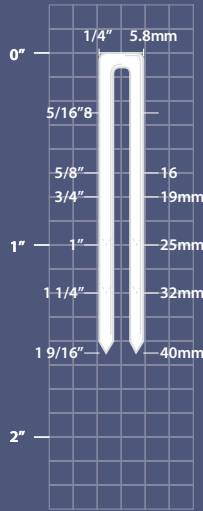

Staplers

18 GA Medium Crown Stapler



LU-9225AC

Features

- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available

Fasteners

- Compatible With 92 Series Atro 92, BeA 92, Bostitch SL5035, JK 664, Nikema 92, Prebena H Series
- $\varnothing$.050 x .040" / 1.25 x 1.00 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.2 kgs	223 x 58 x 199 mm	5 - 7 kg / cm²	100 staples
2.64 lbs	8.8 x 2.3 x 7.8"	70 - 100 psi	100 staples

LU-9225AC

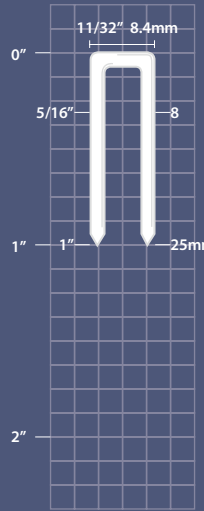

Staplers

18 GA Medium Crown Stapler



LU-G40LAC

Features

- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available
- Vinyl Siding Yoke available : P/N 18303101A

Fasteners

- Compatible With G Series : Complete M, Duo-fast W18, JK 782, Omer SG44, Senco M, Prebena G Series
- $\varnothing$.050 x .040" / 1.25 x 1.00 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.38 kgs	223 x 58 x 249 mm	5 - 7 kg / cm²	100 staples
3 lbs	8.8 x 2.3 x 9.8"	70 - 100 psi	100 staples

LU-G40LAC

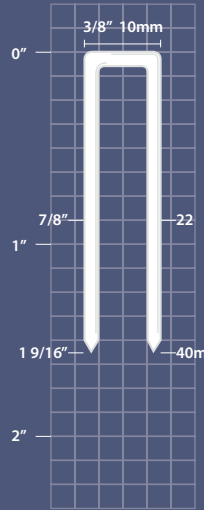

Staplers

18 GA Medium Crown Stapler,
Long Nose



LU-G32HAC

Features

- 360°Adjustable Air Deflector
- Bottom Load
- Light Weight
- Well Balanced
- Vinyl Siding Guide Available
- Long Slim Nose

Fasteners

- G Series
- Compatible With Complete M, Duo-Fast W18, JK 782, Omer SG44, Senco M, Prebena G series
- $\varnothing$.050 x .040" / 1.25 x 1.0 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.35 kgs	223 x 58 x 236 mm	5 ~ 7 kg / cm ²	100 staples
2.97 lbs	8.8" x 2.3" x 9.3"	70 ~ 100 psi	100 staples

LU-G32HAC

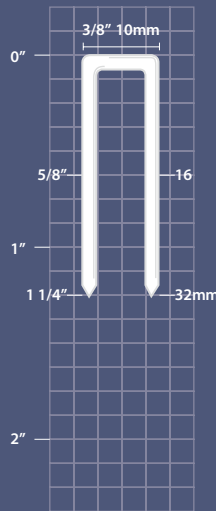

Staplers

80 Series Fine Wire Stapler



LU-8016F

Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust To Avoid Oil Stains On Work Piece
- Slim Long Nose For Easy, Precise Staple Placement
- Extended Trigger For Rapid Stapling
- Double Trigger For Increased Safety
- Full Wrap-Around Rubber Grip

Fasteners

- 80 Series Staples
- Compatible With Complete 80, Atro 8, Bea 80, JK 680, Haubold 800 Series
- $\varnothing$.036 x .028" / 0.91 x 0.71 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
0.88 kgs	219 x 43 x 144 mm	4 - 7 kg / cm ²	140 staples
1.95 lbs	8.6 x 1.7 x 5.7"	60 - 100 psi	140 staples

LU-8016F

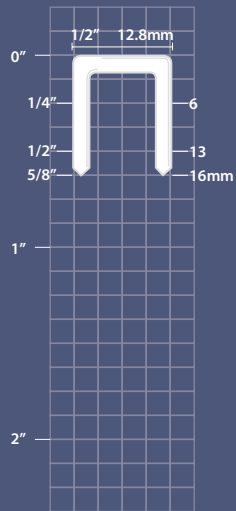

Staplers

18 GA Medium Crown Stapler



LU-G25AC

Features

- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available

Fasteners

- G Series
- Compatible With Complete M, Duo-Fast W18, JK 782, Omer SG44, Senco M, Prebena G Series
- $\varnothing$.050 x .040" / 1.25 x 1.00 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.2 kgs	223 x 58 x 199 mm	5 - 7 kg / cm ²	100 staples
2.64 lbs	8.8 x 2.3 x 7.8"	70 - 100 psi	100 staples

LU-G25AC

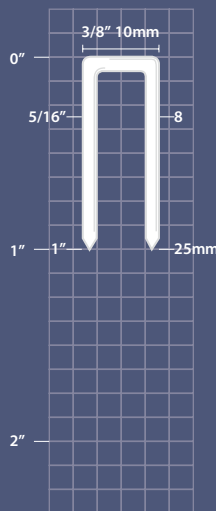

Staplers

80 Series Fine Wire Stapler,
Long Nose



LU-8016LAC

Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust Cover
- Slim Long Nose For Easy Aiming

Fasteners

- 80 Series Staples
- Compatible With Complete 80, Atro 8, Bea 80, JK 680, Haubold 800 Series
- $\varnothing$.036 x .028" / 0.91 x 0.71 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.1kgs	220 x 43 x 215 mm	5 - 7 kg / cm ²	100 staples
2.4 lbs	8.7" x 1.7" x 8.5"	70 - 100 psi	100 staples

LU-8016LAC

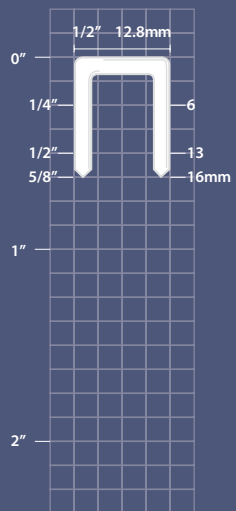

Staplers

Auto-Fire Staplers, Long Magazine



LU-8016AUTO/LM

Features

- New & Improved
- Speed Adjustable. Minimum 27 Staplers/Sec When Adjusted To Highest Speed.
- Light Squeeze Trigger To Single Fire, Full Squeeze To Auto-Fire No Adjustment Needed
- Hammer Cap
- Rear Exhaust
- Bottom Load Long Magazine – Quick Load And Easy Jam Clearance
- Low Fastener Re-Load Indicator Window
- Short Magazine For Single Strip Staple Load Also Available : LU-7116AUTO (Item # L21020) / LU-8016AUTO (Item # L22220)

Fasteners

- 80 Series Staples
- Compatible With Complete 80, Atro 8, Bea 80, Jk 680, Haubold 800 Series


Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.1 kgs	352 x 45 x 148 mm	6 ~ 7.7 kg / cm²	290 staples
2.4 lbs	13.8" x 1.8" x 5.8"	85 ~ 110 psi	290 staples

Applications



LU-8016AUTO/LM



Staplers

50 Series Fine Wire Stapler



LU-5018AC

Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust To Avoid Oil Stains On Work Piece
- Slim Long Nose For Easy, Precise Staple Placement
- Double Trigger For Increased Safety
- Comfortable Rubber Grip

Fasteners

- 50 Series Staples
- Compatible With Complete 50, Duo-Fast 50, Bea 95, Omer 50, Prebena D
- $\varnothing$.050 x .020" / 1.27 x 0.50 mm


Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.0 kgs	220 x 43 x 163 mm	5 - 7 kg / cm²	100 staples
2.2 lbs	8.7 x 1.7 x 6.4"	70 - 100 psi	100 staples

Applications



LU-5018AC

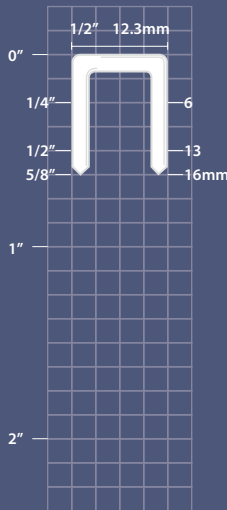

Staplers

71 Series Fine Wire Stapler



LU-7116F

Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust To Avoid Oil Stains On Work Piece
- Slim Long Nose For Easy, Precise Staple Placement
- Extended Trigger For Rapid Stapling
- Double Trigger For Increased Safety
- Full Wrap-Around Rubber Grip

Fasteners

- 71 Series Staples
- Compatible With Complete 71, Atro 7, BeA 71, JK 670, Haubold 7100, Senco C series
- $\varnothing$.030 x .024" / 0.75 x 0.61 mm


Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
0.88 kgs	219 x 43 x 144 mm	4 - 7 kg / cm²	178 staples
1.95 lbs	8.6 x 1.7 x 5.7"	60 - 100 psi	178 staples

Applications



LU-7116F

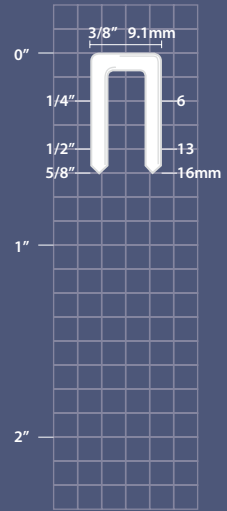

Staplers

71 Series Fine Wire Stapler, Long Nose



LU-7116LAC

Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust Cover
- Slim Long Nose For Easy Aiming

Fasteners

- 71 Series Staples
- Compatible With Complete 71, Atro 7, Bea 71, Haubold 7100, Jk 670, Senco C Series
- $\varnothing$.030 x .024" / 0.75 x 0.61 mm


Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.1kgs	220 x 43 x 215 mm	5 - 7 kg / cm²	100 staples
2.4 lbs	8.7" x 1.7" x 8.5"	70 - 100 psi	100 staples

Applications



LU-7116LAC

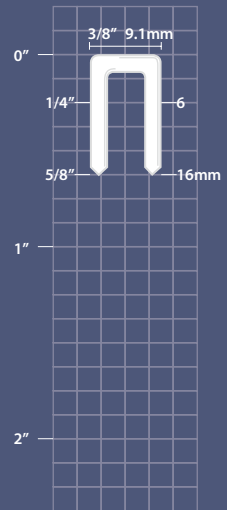

Staplers

Auto-Fire Staplers, Long Magazine



LU-7116AUTO/LM

Features

- New & Improved
- Speed Adjustable. Minimum 27 Staples/Sec When Adjusted To Highest Speed.
- Light Squeeze Trigger To Single Fire, Full Squeeze To Auto-Fire No Adjustment Needed
- Hammer Cap
- Rear Exhaust
- Bottom Load Long Magazine – Quick Load And Easy Jam Clearance
- Low Fastener Re-Load Indicator Window
- Short Magazine For Single Strip Staple Load Also Available : LU-7116AUTO (Item # L21020) / LU-8016AUTO (Item # L22220)

Fasteners

- 71 Series Staples
- Compatible With Complete 71, Atro 7, BeA 71, JK 670, Haubold 7100, Senco C series


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.1 kgs	352 x 45 x 148 mm	6 ~ 7.7 kg / cm²	358 staples
2.4 lbs	13.8" x 1.8" x 5.8"	85 ~ 110 psi	358 staples

LU-7116AUTO/LM



Staplers

14 Series Fine Wire Stapler



LU-1416AC

Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust To Avoid Oil Stains On Work Piece
- Slim Long Nose For Easy, Precise Staple Placement
- Double Trigger For Increased Safety
- Comfortable Rubber Grip

Fasteners

- 14 Series Staples
- Compatible With Haubold 1400, Omer 68, Bostitch SP3020, Prebena VF Series
- 1.030 x .024" / 0.75 x 0.60 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.0 kgs	220 x 43 x 163 mm	5 - 7 kg / cm²	100 staples
2.2 lbs	8.7 x 1.7 x 6.4"	70 - 100 psi	100 staples

LU-1416AC

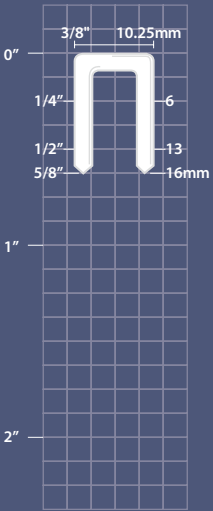

Staplers

Auto-Fire Staplers, Long Magazine



LU-1116AUTO/LM

Features

- New & Improved
- Speed Adjustable. Minimum 27 Staplers/Sec When Adjusted To Highest Speed.
- Light Squeeze Trigger To Single Fire, Full Squeeze To Auto-Fire No Adjustment Needed
- Hammer Cap
- Rear Exhaust
- Bottom Load Long Magazine – Quick Load And Easy Jam Clearance
- Low Fastener Re-Load Indicator Window

Fasteners

- A11 Series
- Compatible With Rapid 140, Arrow T50 Series
- 1.021 x .049" / 0.53 x 1.25 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.1 kgs	352 x 45 x 148 mm	6 ~ 7.7 kg / cm²	216 staples
2.4 lbs	13.8" x 1.8" x 5.8"	85 ~ 110 psi	216 staples

LU-1116AUTO/LM



Staplers

64 Series Stapler



LU-6432

Features

- 360 Degree Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available
- Available With Long Magazine For 504 Staples LU-6432LM

Fasteners

- Duo-Fast 64 Series
- 1.050 x .030" / 1.25 x 0.75 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.2 kgs	223 x 58 x 199 mm	5 - 7 kg / cm²	100 staples
2.64 lbs	8.8 x 2.3 x 7.8"	70 - 100 psi	100 staples

LU-6432

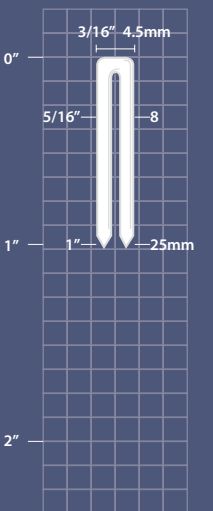

Staplers

64 Series Fine Wire Stapler,
Long Magazine



LU-6432EN/LM

Features

- Extended Long Nose
- Long Magazine To Load 6 Strips Of Staples
- Quick Top Load Magazine For Machine Mount
- 360 Exhaust
- Quick Open Magazine For Jam Clearance
- Pre-Tapped Nose For Quick Machine Mount

Fasteners

- Duo-Fast 64 series
- $\varnothing$.050 x .030" / 1.25 x 0.75 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.86 kgs	642 x 55 x 246 mm	5 - 7 kg / cm ²	504 staples
4.1 lbs	25 1/4 x 2 1/8 x 9 5/8"	70 - 100 psi	504 staples

LU-6432EN/LM

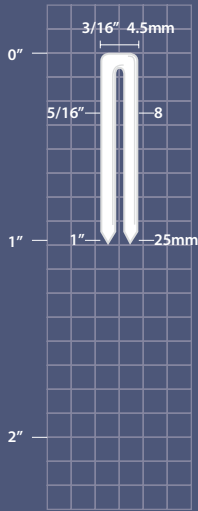

Stapler

16 GA Wire Crown Stapler



LU-2538

Features

- Patented Quick Release Nose Cover
- 360° adjustable air deflector
- Heavy adjustable air deflector
- Sequential fire trigger available(#25205301A)

Fasteners

- 16 Gauge staples
- Compatible With BOSTITCH-BCS(16S2) Series
- $\varnothing$.063 x .055" / 1.6 x 1.4 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.1 kgs	356 x 95 x 290 mm	6 - 8 kg / cm ²	80 staples
6.82 lbs	14.01 x 3.74 x 11.41"	80 - 110 psi	80 staples

LU-2538

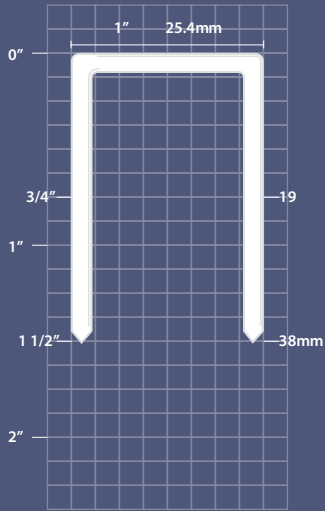

Staplers

97 Series Stapler



LU-9725AC

Features

- 360 Degree Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available

Fasteners

- Atro 93, BeA 97, Bostitch 97, JK 690, Prebena O Series
- $\varnothing$.036 x .028" / 0.92 x 0.70 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.2 kgs	223 x 58 x 199 mm	5 - 7 kg / cm ²	100 staples
2.64 lbs	8.8 x 2.3 x 7.8"	70 - 100 psi	100 staples

LU-9725AC

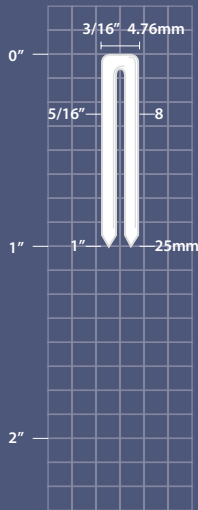

Stapler

16 GA Wire Crown Stapler



LU-2638

Features

- Patented Quick Release Nose Cover
- 360° adjustable air deflector
- Heavy adjustable air deflector
- Sequential fire trigger available(#25205301A)

Fasteners

- 16 Gauge staples
- Compatible With Senco PW150R/P, Hitachi-N5024A/11300, Duo-Fast RNS-17481/1716CGR Series
- $\varnothing$.063 x .055" / 1.6 x 1.4 mm


Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.1 kgs	356 x 95 x 290 mm	6 - 8 kg / cm ²	80 staples
6.82 lbs	14.01 x 3.74 x 11.41"	80 - 110 psi	80 staples

LU-2638

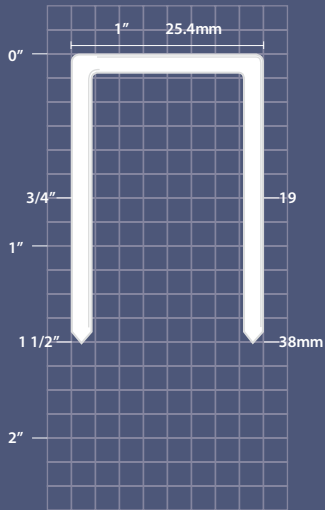

Handwritten notes area with horizontal lines.



Specialty p 36 - 43

Palm Nailer

PTS-8400



Features

- Cost Saving
- Ergo Handle
- Multiple Impact
- Leather Glove Available For Enhanced Comfort

Suggested Air Pressure For Different Range Of Nail Sizes:

Nail size		Air pressure	
mm	inch	kg / cm ²	psi
20 – 25	3/4 – 1"	3.5 – 5.5	50 – 80
25 – 38	1 – 1 1/2"	5.5 – 7.0	80 – 100
38 – 165	1 1/2 – 6 1/2"	7.0 – 8.0	100 – 120

PTS-8400 KIT Accessories Include:

- Plastic Carry Case
 - (L) Magnetized Guide Tip Unit – For Nail Head Ø Up To 10mm
 - (S) Magnetized Guide Tip Unit – For Nail Head Ø Up To 5mm
 - Magnetized Guide Tip Unit
 - Guide Tip – For Larger Diameter Nails or Buttons For Bags or Leather Goods
- Steel Hammer Unit
 - Rubber Hammer Unit
 - Chisel Unit
 - Leather Glove For Enhanced Comfort
 - Maintenance Kits-O-Rings, Wrenches And Oil

Applications



Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1 kgs	124 x 86 x 134 mm	3.5 – 8 kg / cm ²	1
2.2 lbs	4.9" x 3.4" x 5.3"	50 – 120 psi	1

Metal Connector Nailer

AMC-38



Features

- Light Weight, Impact Design To Reach The Tighest Corners
- Nail Point Sticks Out For Accurate Metal Connector Hole Aiming And Fastening
- Sequential Trigger For Precise Nail Placement
- Swivel Belt Hook For Both Left And Right-Handed Users
- Over-Molded Rubber Grip For Added Comfort And Less Fatigue
- Floating Pusher For Quick Re-Loading Of Nails
- Dry Fire Lock To Prevent Un-Intended Nailing
- 360 Degree Adjustable Exhaust Deflector
- Swivel Air-Inlet For Less Hose Tangling

Fasteners


- 34° Paper Tape Round Head Nails.
- Ø :.131-.162" / 3.3 - 4.1mm

Applications

- Joist Hangers
- Metal Connectors

Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.25 kgs	365 x 90 x 295 mm	5.5 - 7 kg / cm ²	29 nails
4.95 lbs	14 3/8" x 3 1/2" x 11 5/8"	80 - 100 psi	29 nails

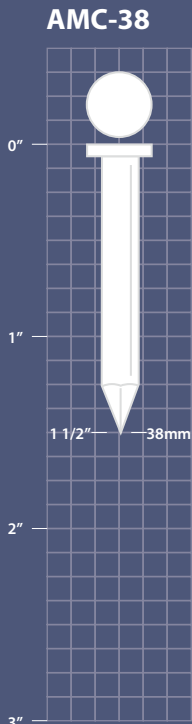

Corrugated Fastener Tools

CF-15AA · CF-15AP



Features

- Bottom Load Magazine
- Easy Magazine Adjustment
- Powerful

Fasteners

- **CF-15AA**
Compatible With Bea W, Duo-Fast CF, Haubold WN, Senco SC2, Omer CF Series
- **CF-15AP**
Compatible With Paslode Series


Applications




Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.7 kgs	286 x 94 x 312 mm	5.5 - 7kg / cm ²	100 fasteners
5.95 lbs	11.3" x 3.7" x 12.3"	80 - 100 psi	100 fasteners

CF-15AA Senco Type



CF-15AP Paslode Type



Pneumatic Hog
Ring Tools

LPHC




Features

- Available In Short (S = 25mm), Medium (M =40 mm) And Long (L = 48 mm) Nose Working Length For Different Applications
- Comfortable Ergonomic Rubber Handle
- Light Weight And Well Balanced
- Adjustable Exhaust Deflector
- Steel Casted Trigger For Enhanced Durability
- Low Noise

Applications

- Bag Closure
- Cage Grid Secure
- Auto Seat
- Wire Mesh Closure
- Label Attachment
- Spring Bed/Mattress

Model coding system:

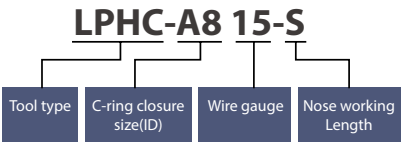

Tool Specifications


Model	WL	C-Ring Type			Tool Weight	Magazine Capacity	Similar to Meihotech	Similar to Stanley
LPHC-A815-S	25mm 1"	Ø 1.8mm .070"	19 mm 3/4"	7.9 - 10.7 mm 5/16 - 13/32"	1.40 kgs 0.64 lbs	100 pcs	MC-6, MC-6LW	SC7
LPHC-A815-M	40mm 9/16"	15 Gauge 15G100			1.45 kgs 0.66 lbs		MC-6LNA, MC-6LNALW	SC7E
LPHC-A815-L	48mm 2"				1.50 kgs 0.68 lbs			SC77XE
LPHC-A515-S	25mm 1"		19 mm 3/4"	4.8 - 8.7 mm 3/16 - 11/32"	1.40 kgs 0.64 lbs	110 pcs	MC-6CA, MC-6CALW	SC7C
LPHC-A816-S	25mm 1"	Ø 1.6mm .063"	19 mm 3/4"	7.9 - 10.7 mm 5/16 - 13/32"	1.40 kgs 0.64 lbs			
LPHC-A816-M	40mm 9/16"	16 Gauge 16G110			1.45 kgs 0.66 lbs			
LPHC-A816-L	48mm 2"				1.50 kgs 0.68 lbs			
LPHC-A516-S	25mm 1"		19 mm 3/4"	4.8 - 8.7 mm 3/16 - 11/32"	1.40 kgs 0.64 lbs	100 pcs	MC-660	SC743
LPHC-C316-S	25mm 1"	Ø 1.6mm .063" 16 Gauge 516G100	12.5 mm 1/2"	3.2 - 5.6 mm 1/8 - 7/32"	1.40 kgs 0.64 lbs			SC760

Pneumatic Hog
Ring Tools


LPHCN



LPHC Series Tools
Conventional C Ring Style

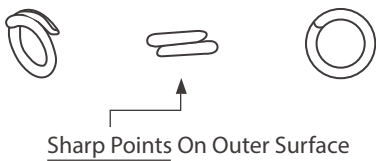

LPHCN Series Tools
New C Ring Style

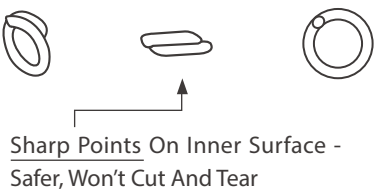

Model	WL	C-Ring Type			Tool Weight	Magazine Capacity	Similar to Meihotech	Similar to Stanley
LPHCN-A815-S	25mm 1"	Ø 1.8mm .070"		7.9 - 10.7 mm 5/16 - 13/32"	1.40 kgs 0.64 lbs	100 pcs		
LPHCN-A815-M	40mm 9/16"	15 Gauge 15G100N	19 mm 3/4"		1.45 kgs 0.66 lbs			
LPHCN-A815-L	48mm 2"				1.50 kgs 0.68 lbs			

Mattress Stapler

MS-1619



Features

- Drives Staples Into Hard-To-Reach Places Such As Bottom Of Coil Springs
- Powerful And Quick Fastener Placement
- Single Or Double Staple Fire Versions Available: Single Staple: Shoots 1 Staple Per Cycle
Double Staple: Shoots 2 Staples Per Cycle, For Increased Efficiency Of Staple Placement
- Tools Available:

Model	Staples used	Firing Version
MS-1619	19mm	Double Staple
MS-1619S	19mm	Single Staple
MS-1625	19 & 25mm	Double Staple
MS-1625S	19 & 25mm	Single Staple

Fasteners


- U-Crown Diversion Points Staples
- Similar To Bostitch BSC31
- $\varnothing$.062 x .057" (1.6 x1.4mm)

Applications

- Bedding
- Spring-Up Assembly

Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.5 kgs	470 x 35 x 830 mm	5 -7 kg / cm ²	180 staples
7.7 lbs	18.5" x 1.4" x 32.7"	70 ~ 100psi	180 staples

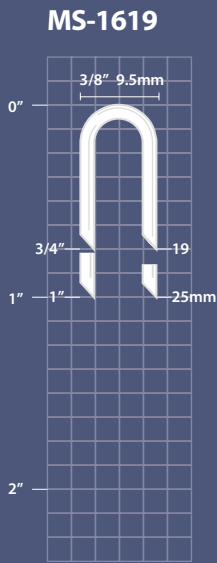

18 GA Flooring Stapler



Features

- Light & Well Balanced
- Powerful, Drives Into Hardwood At Ease.
- Quick Adjustable “Legs” And “Shoe” To Adapt 6–16mm (1/4 – 5/8”) Thick Tongue-And-Groove Hardwood Floors
- Drives Staples At A Perfect 45° Angle Every Time And
- Avoids Tongue Splitting And Floor Surface Damage

Fasteners


- 90 Series Staples
- Compatible With Complete L, Atro 90, BeA 90, Duo-Fast 1800, Hitachi 11100, haubold 6000, ISM 90, JK 781 & Senco L series
- $\varnothing$.050 x .040" / 1.25 x 1.0mm

Applications

- Pre-Finished Groove-And-Tongue Hardwood Floor Installation

Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.78 Kgs	360 x 90 x 300 mm	5 - 7kg / cm ²	160 Staples
3.9 lbs	14 1/8" x 3 1/2" x 11 7/8"	70 - 100 psi	160 Staples

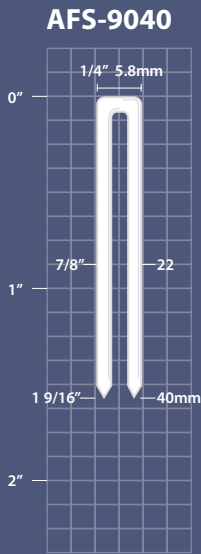

Specialty

Pneumatic Clinch Nailer




CN-70CL

- Features
- Ergonomic Design, Ideal for Pallet Repairs
 - Powerful, Rapid Nailing Performance
 - Well Protectors Equipped
 - Top Exhaust Cap Available

- Fasteners
- 15° Flat Wire Collated Clinch Nails
 - Length: 1-3/4"~2-1/4" (45-57mm)
 - Shank Diameter : .090-.113" (2.3-2.9 mm)
 - Shank Type : Smooth, Ring & Screw

Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
7.6 kgs	370 x 148x 400 mm	5-7 kg/cm ²	225-300 nails
16.76 lbs	14.6" x 5.83" x 15.75"	70-100 psi	225-300 nails

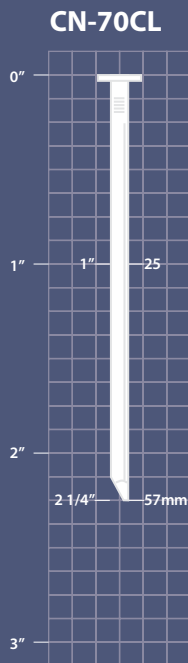

Specialty

Hardwood Flooring Stapler




HWFS-50

- Features
- Patented Quick Release Nose Cover
 - Drives Staples at a Perfect 45° Angle
 - Powerful, Drives Into Hardwood at Easy
 - Avoid Tongue Splitting and Floor Surface Damage
 - Extra-Wide Composite Base Plate for Added Stability
 - Long Reach Handle for Comfort and Easy Operation
 - Top Load Long Magazine

- Fasteners
- Compatible with Hitachi 04722H/24H, Bostitch BCS1512/14/16 Series
 - 1/4" x .071" x .064" / 1.8 x 1.6 mm

Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
4.5 kgs	453 x 92 x 560 mm	5-7 kg/cm ²	140 staples
9.92 lbs	17.83" x 3.62" x 22.05"	70-100 psi	140 staples

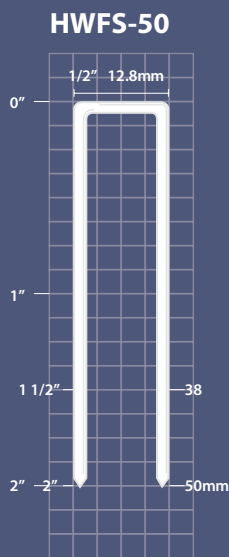

Accessories

Sequential Trigger Kit

Nailers	RN-45E2	25011001A
	CN-565	27305001A
	AN-13021E	25205301A
	AN-10021E	25205301A
	AN-10034E	25205301A
	L2190	30805301A
	L3490	30805301A
Staplers	LU-1580F	25205301A
	LU-216LC	34903501A

Selectable Single / Bump Fire Trigger Valve Asm

Nailers	LT-50LLAC	11003302A
	LNF-50E	11003302A
	LNF-32AD	11003302A
	LNF-50AC	11003302A
Staplers	LU-50040LAC	11003303A
	LU-9025AC	11003304A
	LU-9040LAD	11003306A
	LU-9225AC	11003304A
	LU-G25AC	11003307A
	LU-G32HAC	11003308A
	LU-G40LAC	11003309A
	LU-6432	11003310A
	LU-9725AC	11003311A

Vinyl Siding Yoke Kit

Staplers	LU-G25AC	12003101A
	LU-G40LAC	18303101A

1/4" Swivel Plug

1/4" Swivel Plug (US, NPT)	12106410
1/4" Swivel Plug (Asia, PT)	12106411
1/4" Swivel Plug (Europe, PT)	12106408

Belt Hook Kit


Nailers	LT-50LLAC	13907801A
	LNF-32AD	13907801A
	LNF-50AC	13907801A
Staplers	LU-50FAC	13907801A
	LU-50040LAC	13907801A
	LU-9025AC	13907801A
	LU-9040LAD	13907801A
	LU-9225AC	13907801A
	LU-G25AC	13907801A
	LU-G32HAC	13907801A
	LU-G40LAC	13907801A
	LU-6432	13907801A
	LU-9725AC	13907801A

Remote Fire Control Trigger Valve

Nailers	CN-57E	23303805A
	CN-70E2	23303805A
	CN-83E	23303805A
	CN-90LH	23303805A
	CN-100E	23303805A

No-Mar Tip

Nailers	CN-565	27309801
	AN-10021E	16104001
	AN-10034E	16104001
	L2190	16104001
	L3490	16104001
	LT-1664A	21903602
	LT-50LLAC	22903802
	LNF-50E	22903801
	LNF-32AD	22903802
	LNF-50AC	22903802
	PT-635	92601701

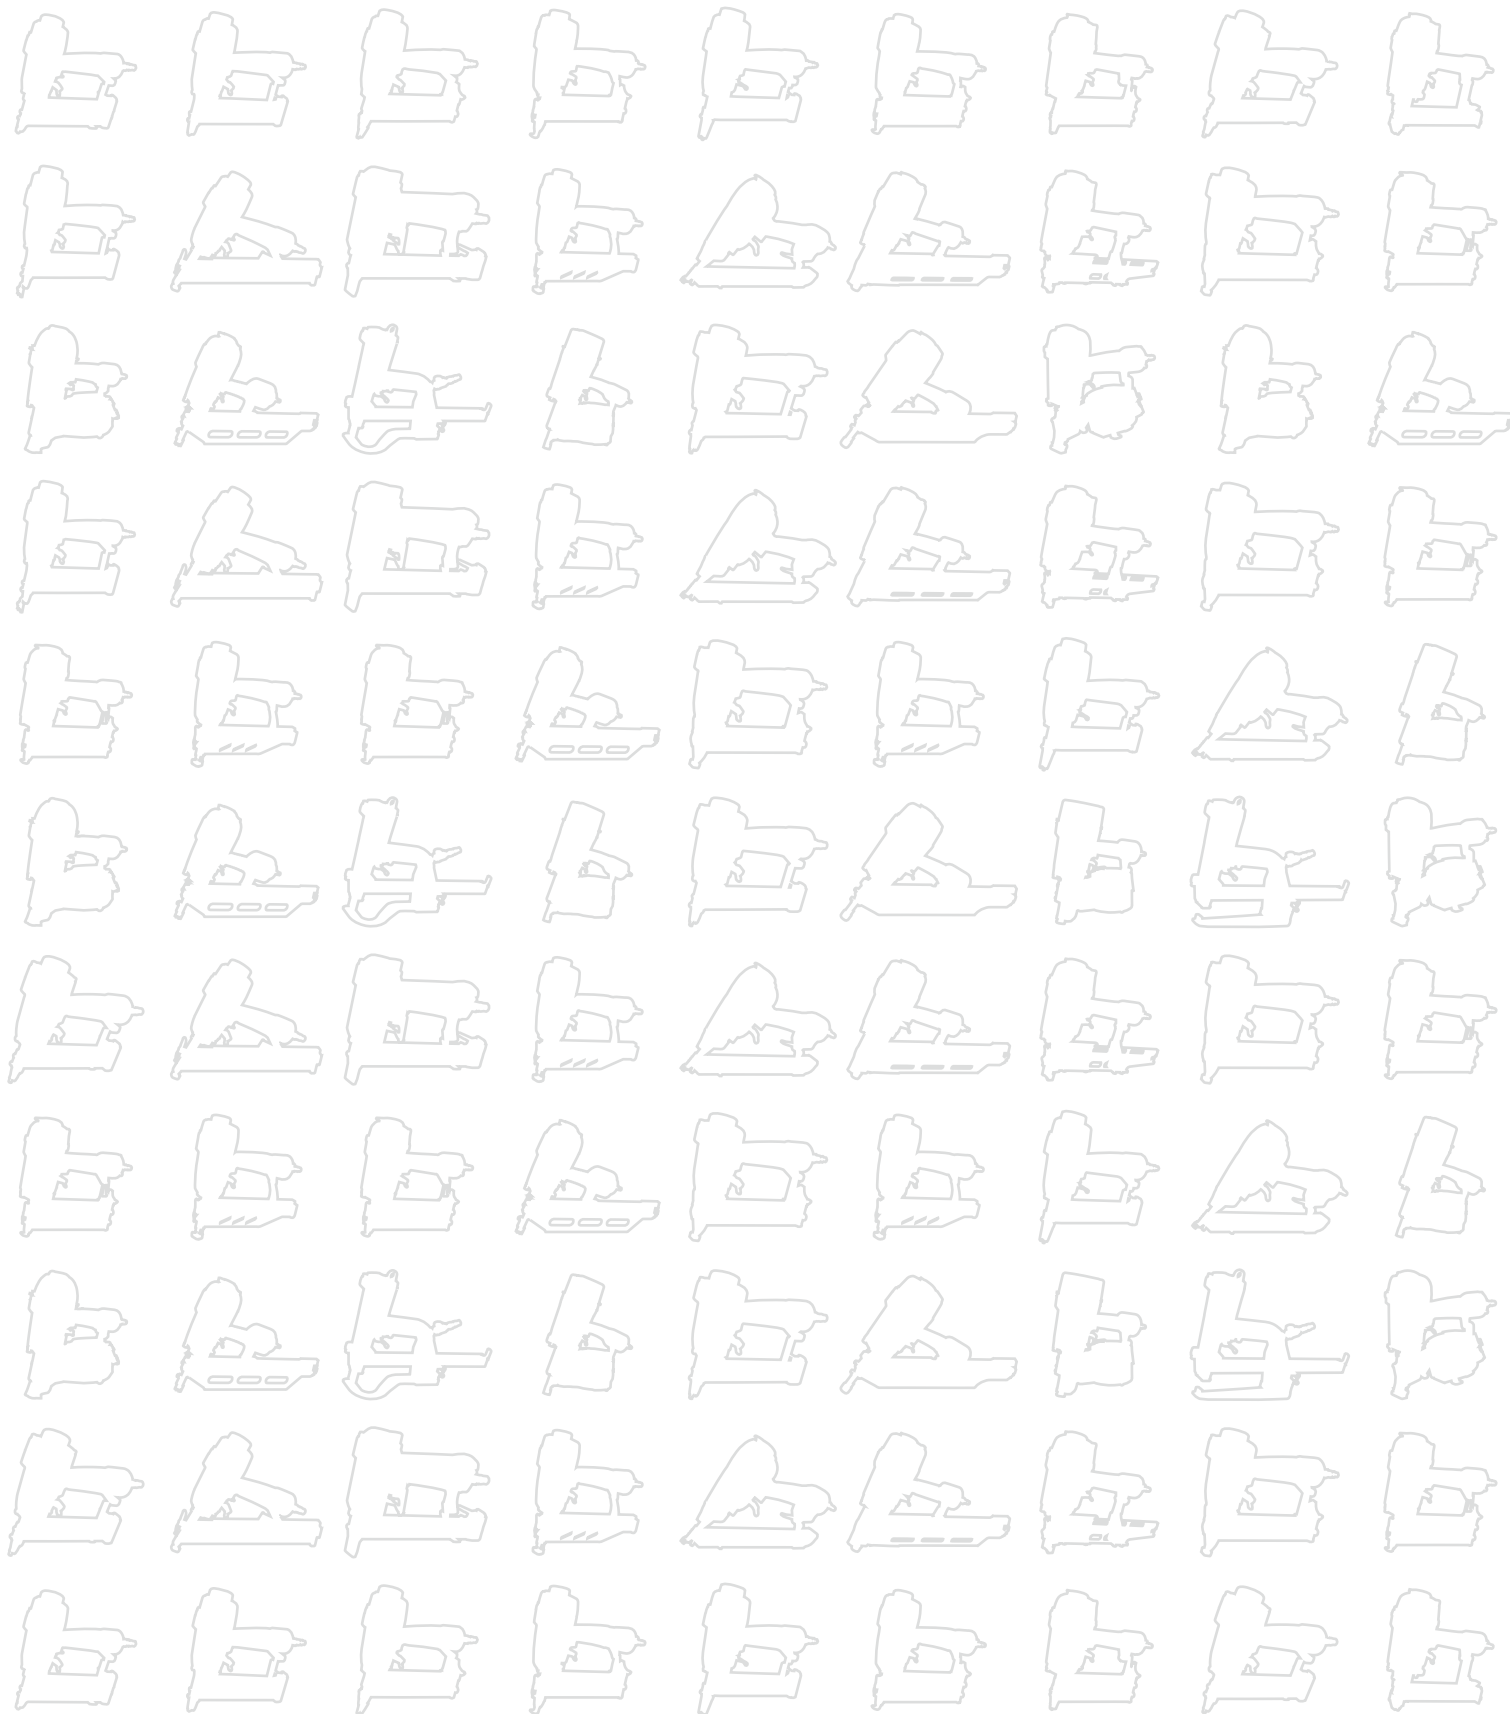

APACH INDUSTRIAL CO., LTD.
 176 Industrial 9th Rd., Tali Dist.,
 Taichung City, Taiwan 41280
 Tel +886 4 2491 5576
 Fax +886 4 2491 5580
www.apach.com.tw



US DISTRIBUTOR
Axxis
 Tel 888-392-9947
www.axxisus.com

